


KJ-2250BC

22 BHP Duplex Plunger Pump

Intermittent Duty

S/N: KJ-229
Power: 7HP
Capacity: 27.84/min or 734PM

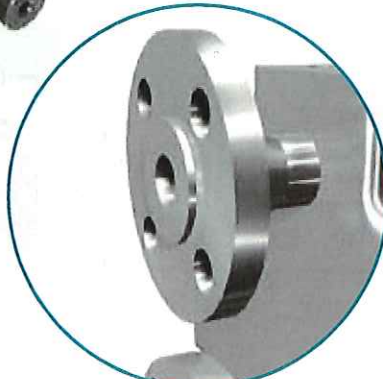

(OPTIONAL DISCHARGE FLANGES)

SPECIFICATIONS

Configuration	Horizontal Duplex Plunger
Number of Plungers	2
Stroke Length	2.5" / 63.5 mm
Frame Load Rating	3,250 lbs
Fluid Cylinder Pressure Rating	3,600 PSI
Pump Weight (Avg.)	230 lbs / 105 kilos
Kerr Max Speed	430 RPM
Minimum Speed	100 RPM
Mechanical Efficiency (Bare Shaft)	80%
Lube System (Standard)	Splash - Gravity Feed
Lube System (Optional)	Force Feed
Lube Oil Capacity	3 quarts / 2.85 liters
Lube Oil Type	Petroleum per AGMA 5EP (ISO 220) or Synthetic per SAE 75W-90 (ISO 100)
Connection Sizes	2" NPT Suction 1 1/4" NPT Discharge

FLUID END

Cast Carbon Steel (WCB)
Cast Nickel Aluminum Bronze (955)
Cast Stainless Steel CF8M (316)
Cast Duplex SS CD3MN (2205)
Forged Carbon Steel (A105)
Forged Stainless Steel (316)

VALVES

Disc Type / Seat (Max. 2,160 PSI)	Wing Guided
Delrin Disc / SS (316)	Ni-Al-Brz (955) / Metal-to-Metal
Delrin / Ni-Al-Brz (955)	Monel / Metal-to-Metal
Delrin / Duplex SS (CD4MCU)	SS (316) / Metal-to-Metal
SS (316) / SS (316)	17-4 HT Metal-to-Metal
Titanium / SS (316)	SS (316) / AR Urethane Inserted
PEEK / SS (316)	17-4 HT / AR Urethane Inserted

PLUNGERS

Colmonoy 730 Hard Coat
Solid Ceramic (2,160 Max. PSI)
Kerramic (Ceramic) Coated
Solid 316 Stainless Steel

* Consult Factory for Authorized Drawings for Dimensions

1) Displacement is based on 100% Volumetric Efficiency (VE)






2) Consult factory for operating speeds above maximum shown

KJ-2250BC

22 BHP Duplex Plunger Pump

Intermittent Duty

Serial # KJ-229

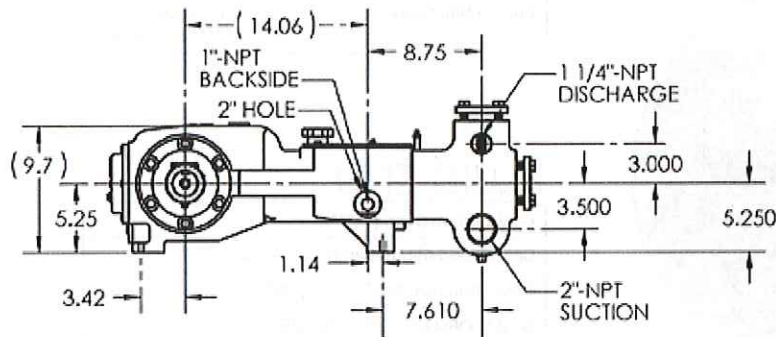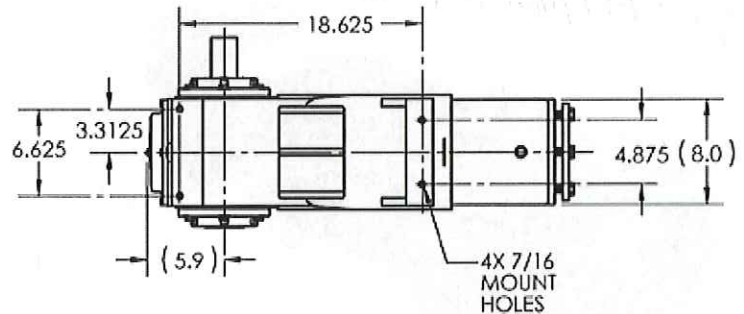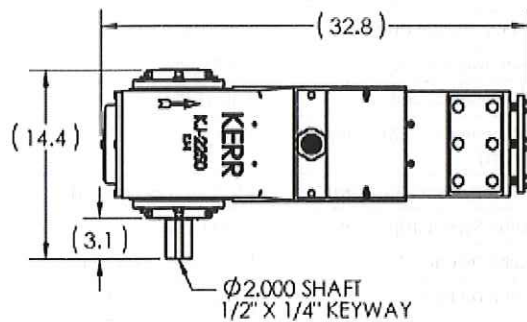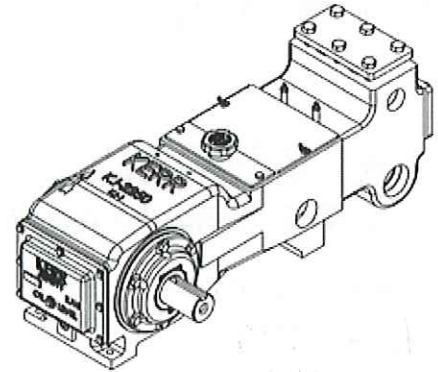

PLGR DIA. INCHES	MAX PRESS PSI	DISP GAL PER REV	DISPLACEMENT																	
			100 RPM		150 RPM		190 RPM		230 RPM		270 RPM		310 RPM		350 RPM		390 RPM		430 RPM	
			GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD
1.250	2648	0.0266	2.7	91	4.0	137	5.0	173	6.1	210	7.2	246	8.2	282	9.3	319	10.4	355	11.4	392
1.500	1839	0.0382	3.8	131	5.7	197	7.3	249	8.8	302	10.3	354	11.9	407	13.4	459	14.9	512	16.4	564
1.750	1351	0.0521	5.2	179	7.8	268	9.9	339	12.0	411	14.1	482	16.1	554	18.2	625	20.3	696	22.4	768
2.000	1035	0.0680	6.8	233	10.2	350	12.9	443	15.6	536	18.4	630	21.1	723	23.8	816	26.5	910	29.2	1003

Motor : 10 HP, 1175 rpm / Sheave Size 0.25" motor to 1.5" pump pulley drive system
1175 rpm 190 rpm

* Consult Factory for Authorized Drawings for Dimensions
1) Displacement is based on 100% Volumetric Efficiency (VE)
2) Consult factory for operating speeds above maximum shown